

# **Cut and Hypodermic Needle Resistant Gloves**

### DESCRIPTION

Featuring a a 10-gauge Aralene shell that provides both cut and heat resistance, these gloves provide extreme cut resistance and hypodermic needle protection with Alycore inside. The shell is enhanced by an orange etched rubber palm dipped. See diagram for detailed explanation of Alycore areas. Each pair is individually hang-tagged for retail sale.

### **INDUSTRY**

Recycling/Waste

**Forestry** 

Management

**Lumber Industry** 

Cable

**Rebar Handling** 

Construction


**Barbed Wire** 

**Demolition** 

### **FEATURES**

- Alycore delivers unparalleled results with ultimate technology in the world of cut, puncture and needle resistance while still remaining lightweight, flexible, breathable and washable
- ANSI cut level A9 palm, ANSI cut level A9 bottom of fingers and thumb
- ANSI hypodermic needle puncture resistance levels: 5 (palm), 3 (bottom of fingers and thumb)
- Aralene is an aramid fiber that provides cut ad heat resistance
- · Etched rubber palm improves grip in wet conditions and is puncture resistant

### **SIZES 8(M) - 10(XL)** ITEM AC600KV

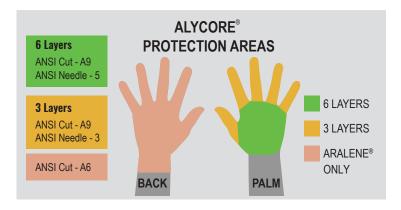

## **SPECIFICATIONS**

SHELL	GAUGE	COLOR	DIP	COATING	CUFF	ANSI CUT	ASTM F2992- 15 RESULTS	ANSI NEEDLE RESISTANCE	EN 388
ARALENE	10	YELLOW	PALM	ETCHED RUBBER	KNIT WRIST	PALM - A9 BOTTOM OF FINGERS - A7	>8000	PALM - LEVEL 5 BOTTOM OF FINGERS - LEVEL 3	4544F

### **PACKAGING**

	QUANTITY	8(M)	9(L)	10(XL)
PAIR UPC	1	816368026886	816368026893	816368026909
INNER PACK GTIN	12/PACK	10816368026883	10816368026890	10816368026906
CASE GTIN	6 PK/CASE	20816368026880	20816368026897	20816368026903

	8(M)	9(L)	10(XL)	
using the ASTM F2878-1	0 standard	with 25-gau	ge needles.	

ANSI needle resistance level based off third-party independent lab test results

**CASE WEIGHT (IN POUNDS)** 32.2 33.7 35.8 **BLACK OVERCAST COLOR GREEN BROWN** 

13915 Radium St NW Ramsey, MN 55303

763-450-0110 sales@GlobalGlove.com

GlobalGlove.com

