

RECHARGEABLE

INTRINSICALLY SAFE DUAL-LIGHT™ FLASHLIGHT

XPR-5522GMX

NIGHTSTICK
Life Depends on Light™



DUAL SWITCHES

Easily operate **independent flashlight and floodlight**, or simultaneous in Dual Light™ mode.



An **soft, unfocused floodlight** is integrated into the housing, perfect for close-up illumination.



Dual body switches are perfectly placed for easy one-handed operation, even with gloves.



Integrated magnets in handle base and the pocket clip provide options for limitless hands-free usage.

FL 1 STANDARD		
 240 LUMENS	 8h	 178m
 7964cd	 2m	 1m

CERTIFIED



MSHA

400 LUMENS

1-800-233-2155 · 1-469-326-9400 · nightstick.com

© 2019 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit nightstick.com for product updates.

X-SERIES™**DUAL-LIGHT™ FLASHLIGHT****RECHARGEABLE****ITEM NUMBER/UPC**

XPR-5522GMX - 017398805643

CERTIFICATIONS

- CE
- cETLus
- ATEX
- IECEX
- MSHA

CASE MATERIAL

- ABS polymer

LUMENS/RUNTIME**SPOTLIGHT**

- HIGH: 240L, 8 hrs. runtime

FLOODLIGHT

- HIGH: 175L, 8.5 hrs. runtime

DUAL-LIGHT

- HIGH: 400L, 4.75 hrs. runtime

CANDELA

- HIGH: 7,964

BEAM DISTANCE

- HIGH: 178m

WATER RATING

- IP-67 (dustproof, waterproof)

DROP RATING

- 2 meters

DIMENSIONS

- LENGTH: 7.4 in (188mm)
- WIDTH: 1.7 in X 1.3 in (33mm x 43mm)
- BEZEL DIAMETER: 2.1 in (53mm)
- WEIGHT: 9.9 oz (280g)

BATTERY

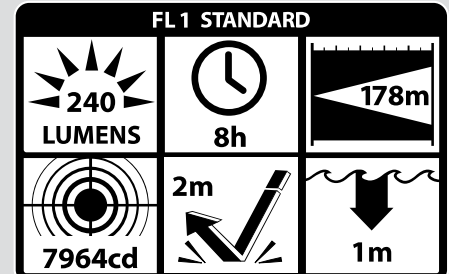
- Integrated Li-ion battery (included)

WARRANTY

- Limited lifetime warranty

WHAT'S INCLUDED

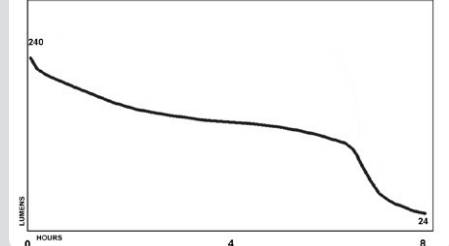
- Light with battery
- Lanyard
- Charger
- AC & DC cords

**Bayco Products, Inc.**640 S. Sanden Blvd.
Wylie, TX 75098Model XPR-5522GMX Safety Flashlight
Permissible Flashlight Assembly

APPROVAL No. 20-A160002-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

- WARNINGS: 1) MSHA approved for use with one part number 5522-BATT rechargeable battery pack only.
2) The Model XPR-5522GMX Safety Flashlight is only to be charged on the surface, or underground in accordance with the applicable regulations pertaining to battery-charging stations (reference 30 CFR 75.240) with a Bayco Products, Inc. model 5522-CHGR1.
3) Do not open in areas where permissibility is required.

XPR-5522GMX FLASHLIGHT PERFORMANCE CURVE**CERTIFIED**

MSHA