



Meltblown, double lamination Universal roll

1MBGRL



Meltblown | Universal | Roll | Double lamination

Basis weight: Heavy

Absorbency: 38 US Gallons | 144 Liters of oil**
32 US Gallons | 121 Liters of water**



Base Fiber: Polypropylene

Meltblown

Product Code	Color	Weight	Format	Size inches (cm)	Recycled Content	Units/Case	LTL/Pallet	FTL/Pallet
Universal								
1MBGRL	Gray	Heavy	Roll	30" x 150' (76 cm x 46 m)	30%*	1	18	27

Double lamination meltblown

Spun-bond cover
Meltblown polypropylene core
Spun-bond cover

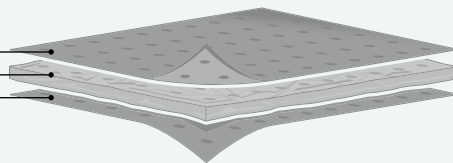

This product is in a Universal format



This is one of our heavy weight products

With a heavy weight this roll at 150' long is one of our heavier per square foot product. This construction is a dependable all-round performing Universal absorbent. It features a high loft meltblown core with tough spun-bond polypropylene covers to the top and bottom. The pads have unbeatable durability and are lint-free (stray fibers won't become detached). Caution is recommended however, as any foot traffic should be avoided on this product as it can be very slippery under foot. The roll is 30" x 150' (76 cm x 46 m) and features repeated perforations 7.5" in-line and 20" across. The roll is supplied in a clear plastic bag.

Key features

- The strongest Universal absorbent in the meltblown family
- Lint-free

- Meltblown core delivers high absorbency
- Tough spun-bond covers resist rips and abrasions, even when wet
- Durability reduces replacement costs
- Absorbs both water-based liquids and petroleum-based fluids
- Perforated for more economical use.

Application

The best choice when you need a tough, lint-free absorbent. Ideal for wiping sharp tools and equipment with rough edges. Great for lining spray booths. Durable enough to withstand moderate foot- and forklift traffic.

Notes

- Fire retardant as per ASTM 726.
- Ensure that disposal of these sorbents complies with all local, state and federal regulations.

* Basis weights and recycled content are ± 5%
** Measures a case/bale using ASTM 726 (long test) with medium viscosity oil and tap water. Statistical average derived from real time production QC data.
*** Weight per case ± 0.5 lbs/kg.

Compliance

Related Regulations	Description
29CFR 1910.22(a)(2)	"The floor of every workroom shall be maintained in a clean and, so far as possible, a dry condition."
29CFR 1910.120(j)(1)(vii)	"... suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks or ruptures may occur."